



Jiacai led display


## OUTDOOR LED SCREEN

P3 P4 P5 P6 Wifi 3G 4G Intelligent Waterproof Outdoor Street Advertising Smart Led Screen Lamp Light Pole Led Display

Pixel Pitch: 2.5/3/4/5/6mm

Cabinet Size: Customized

Operating Environment: Outdoor

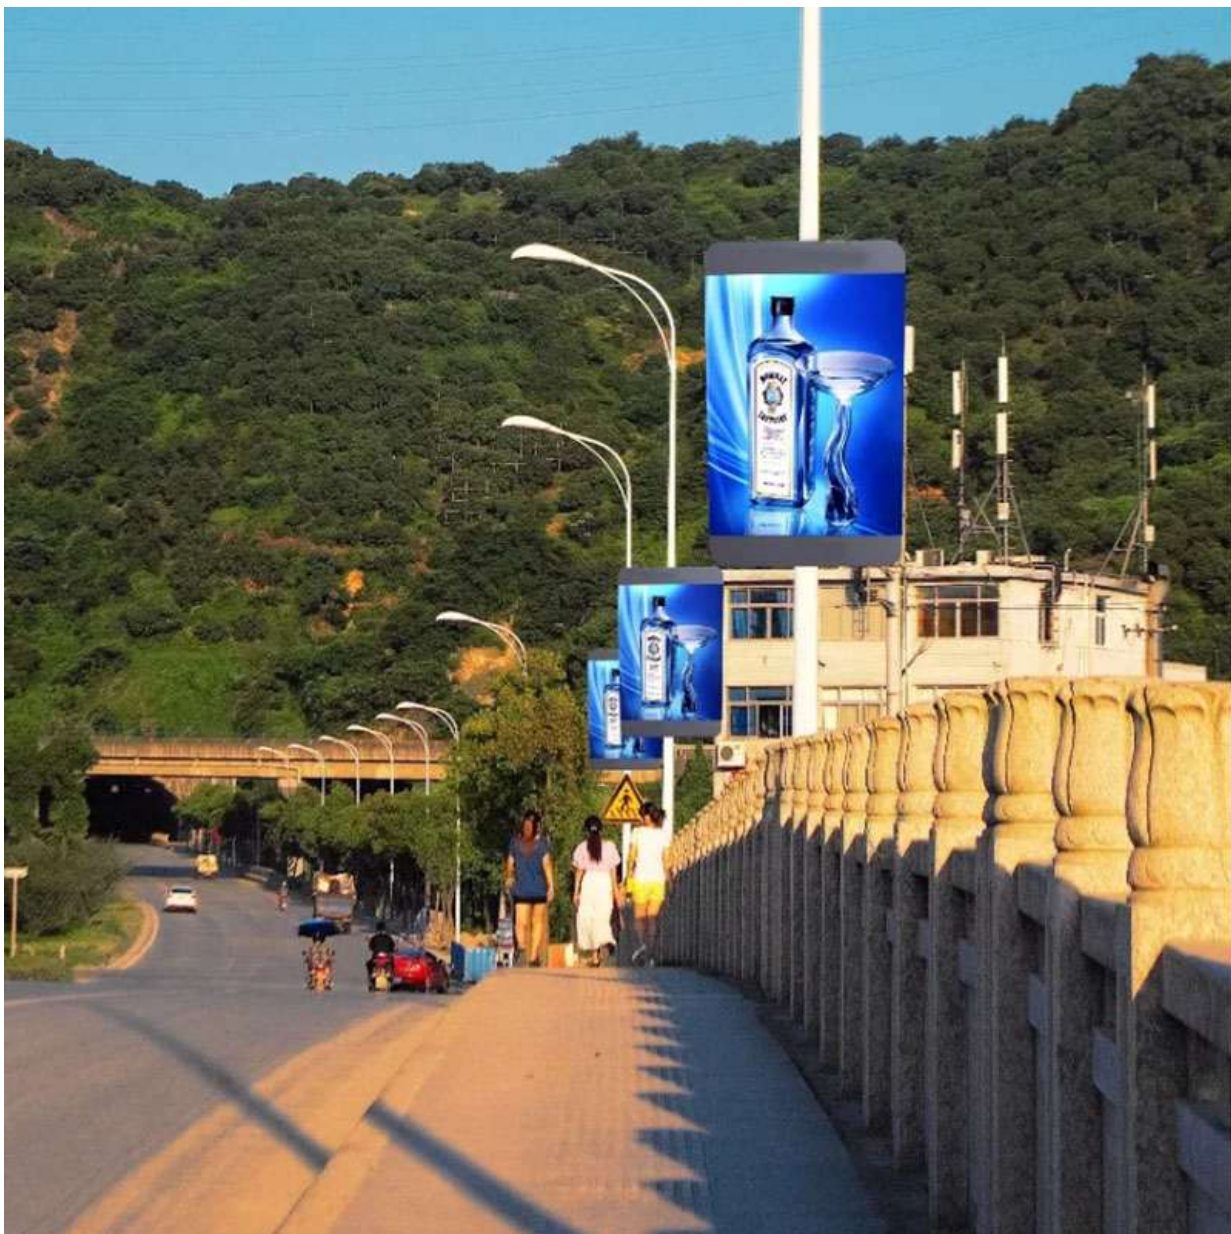



Jiacai led display

## Outdoor Light Pole LED Screen


P3 P4 P5 P6 Wifi 3G 4G Intelligent Waterproof Outdoor Street Advertising Smart Led Screen Lamp Light Pole Led Display

# OUTDOOR POLE LED SCREEN

Outdoor IP65 waterproof iron cabinet  
(single side or double side)



- Remote cluster control
- Synchronous display
- Optional - Synchronous stereo
- Automatic brightness adjustment
- Optional - Remote power off control

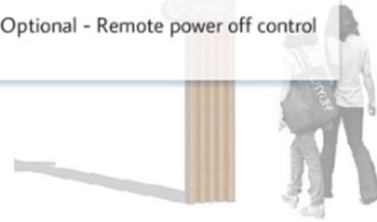



Jiacai led display

## **EASY MAINTENANCE**

control fault data in real time point-to-point maintenance

 IP65 Waterproof	 High light	 Weather resistant
 Smart cooling	 Energy saving	 High data security



**Double sided design**

## **Automatic brightness adjustment**

The brightness of the screen can be automatically adjusted with the brightness of the outside light



Jiacai led display

## **Control system & operate**

4G/WIFI control by mobile phone/computer  
/ipad/cloud,you can send the videos to the screens  
together without distance limitation






Jiacai led display


# PRODUCT DETAILS

## MODULE COMPOSITION


Outdoor module :p2.5 ,p3, p4, p5

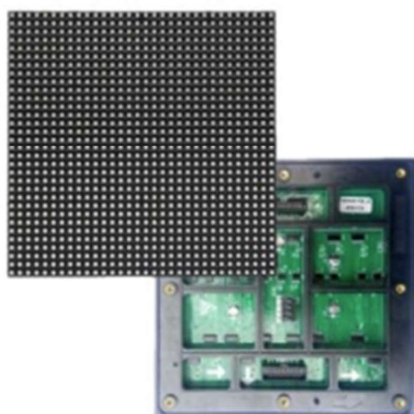

160x160mm

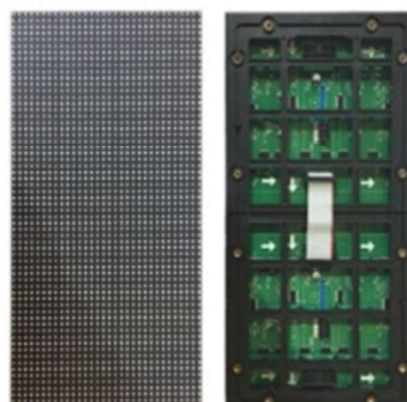

256x128mm

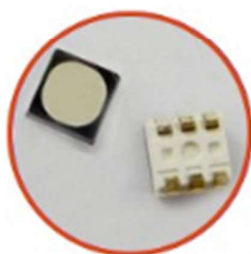


SMD lamp




Protective guard



Pin header



Driving IC



Mask



## Jiacai led display

### 1 OPTIONAL - REMOTE POWER OFF CONTROL

Remote control, display screen and other equipment power supplyThe on/off




### 2 MOUNTING LED LAMP

High brightness ,good flatness, stable performance,uniform color

### 3 PRETECTIVE GUARD

pin prectective guard convenient installation, it can also prevent

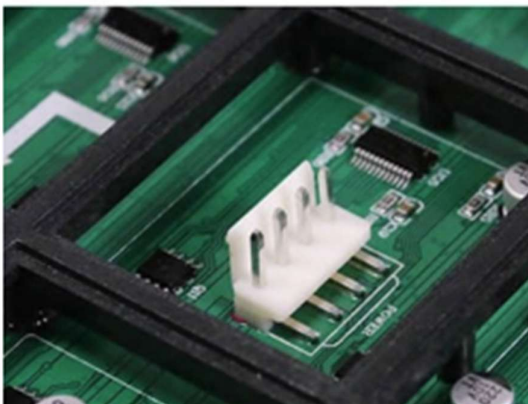


### 4 BINDING POST

Convenient assembly,wiring tightly  
Good insulation between terminals



Jiakai led display

# APPLICATION

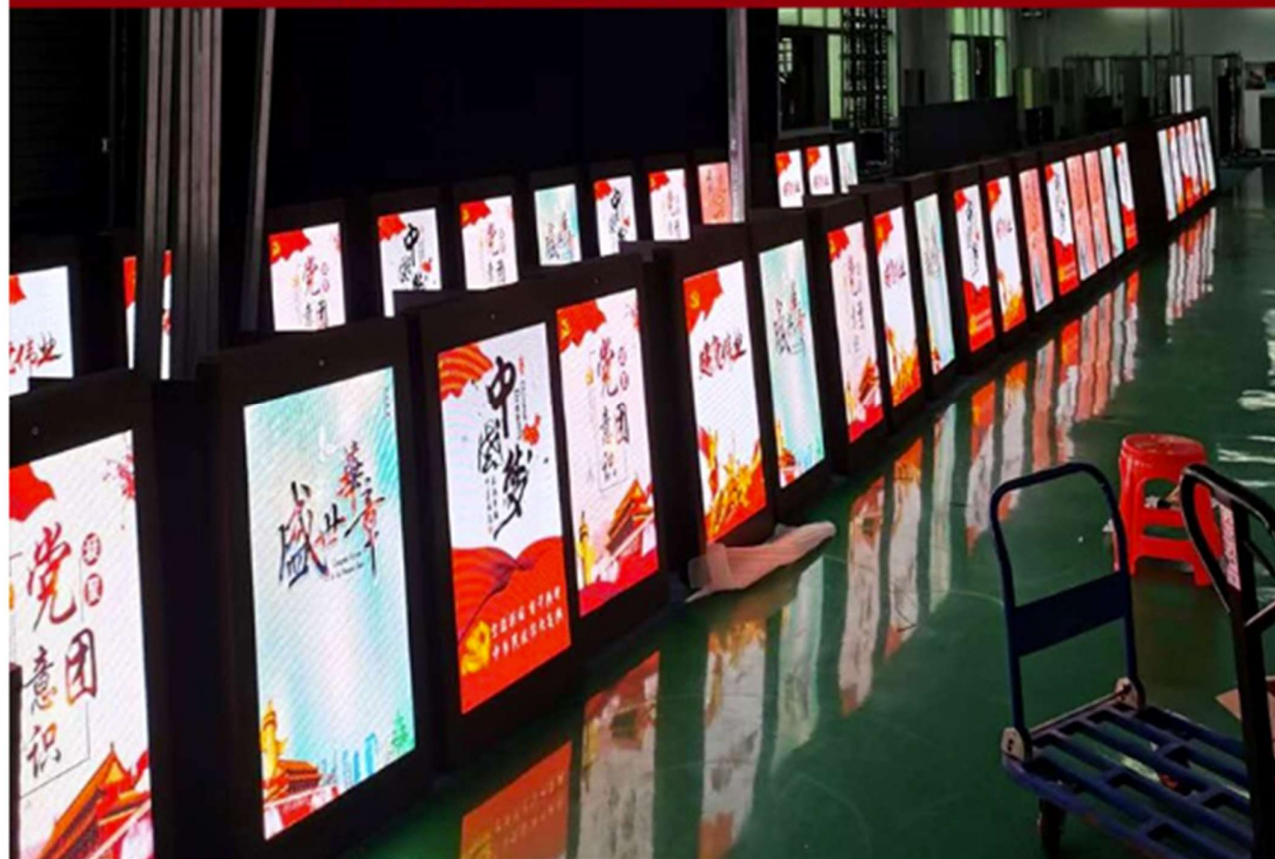



## Jiacai led display

Style	JF2.5	JF3	JF3.076	JF4	JF5	JF6
Pixel Pitch(mm)	2.5	3	3.076	4	5	6
Pixel Matrix Per Sq.m	160000	111111	105688	62500	40000	27777
Pixel Configuration	SMD1415	SMD1921	SMD1415	SMD1921	SMD2525	SMD3535
Brightness (nits)	5000	5000	5000	5000-5500	5000-6000	5500-6000
Scan	1/16	1/16	1/13	1/10	1/8	1/8
Module Dimension	320x160mm	192x192mm	320x160mm	320x160mm	320x160mm	192x192mm
Cabinet Dimension	960x960mm (Cabinet size can be customized according to module size)					
Cabinet Weight	42kg / 93lb (Iron)	42kg / 93lb (Iron)	41kg / 90lb (Iron)	40kg / 88lb (Iron)	40kg / 88lb (Iron)	46kg / 101lb (Iron)
Power Con. (Max / Avg)	900/ 180 w/sq.m	900/ 180 w/sq.m	900/ 180 w/sq.m	900/ 180 w/sq.m	900/ 180 w/sq.m	900/ 180 w/sq.m
IP Rate	IP65					
Service Access	Rear					
Refresh Rate (HZ)	1920-3840HZ					
Grey Scale (bit)	16bit					
Viewing Angle (H/V)	160/140					





## Jiacai led display

Input Voltage (AC)	110V/240V	
Input Voltage (AC)	110V/240V	