



LED MODULE

4K High Refresh P2 Indoor Led Display Module Interior Pantalla Led SMD
RGB Full Color Led Panel Screen

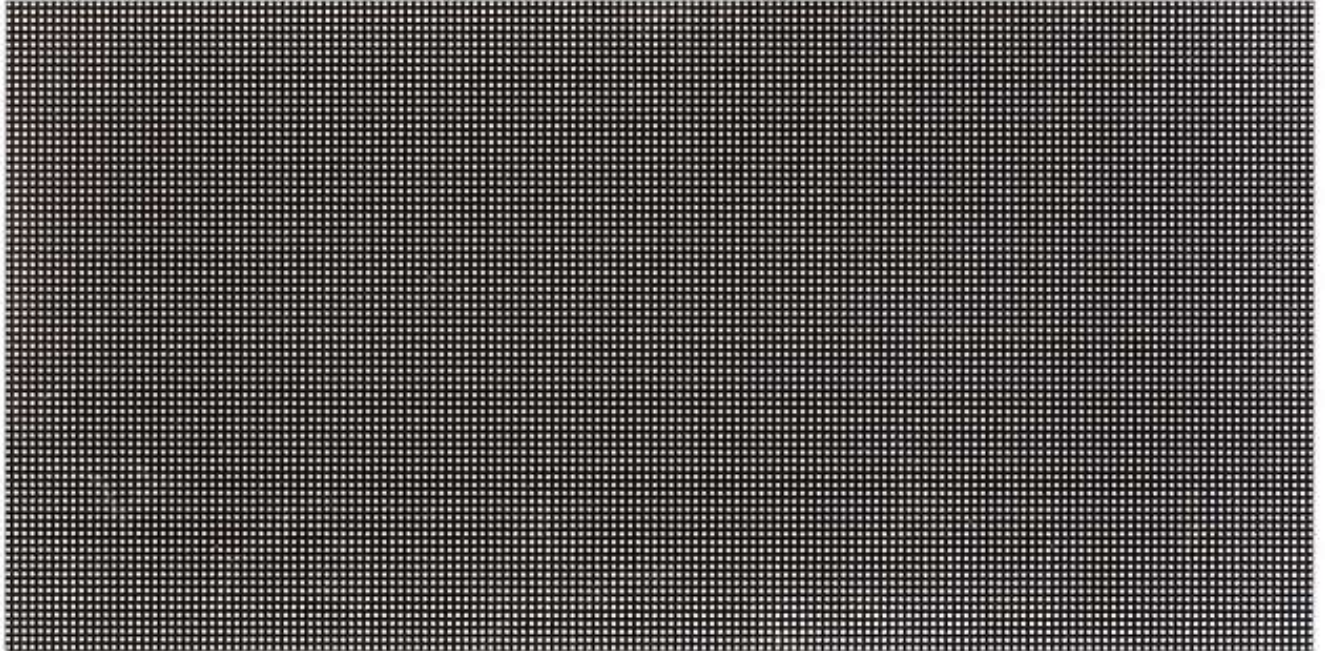


LED MODULE

High refresh for good display effect, high brightness,
low power consumption

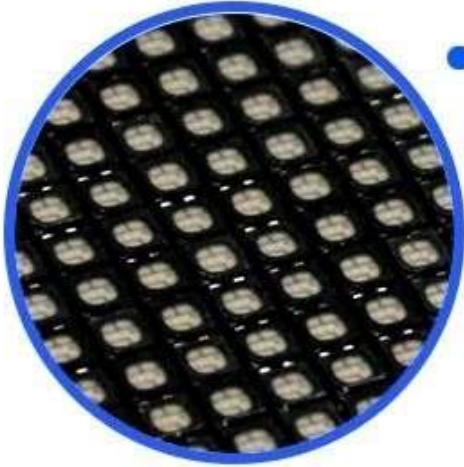

- High brightness
- High refresh rate
- High quality

SMD1515 black led
3840hz refresh rate

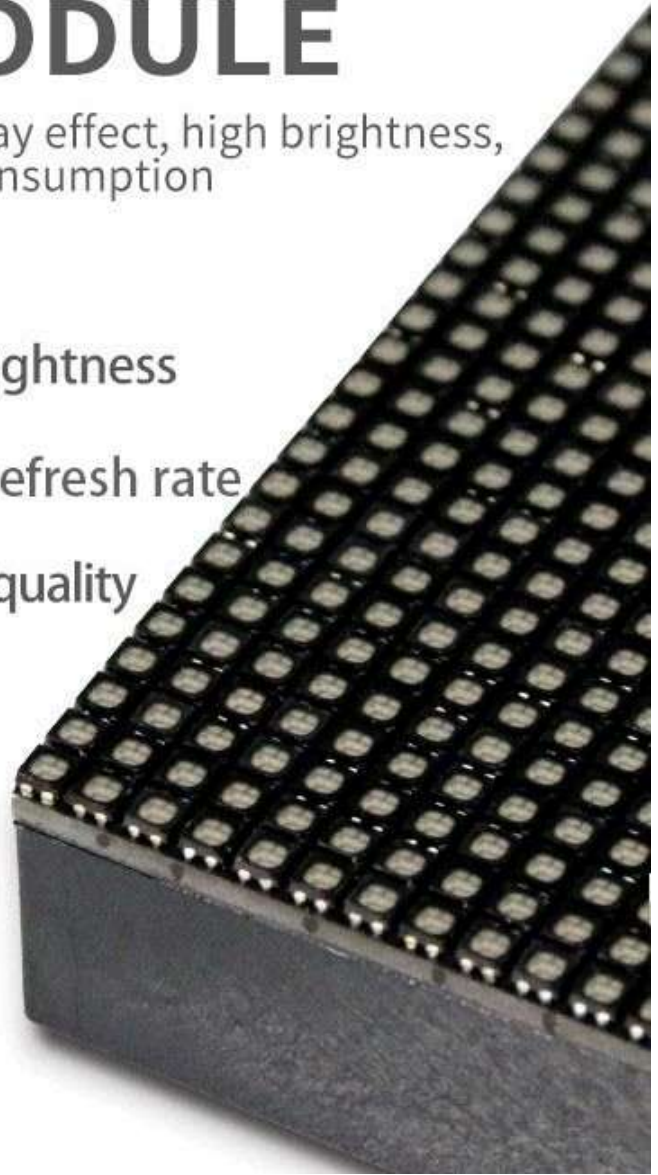

PCB CIRCUIT BOARD

The circuit board adopts the wave soldering process and has an oxygen barrier layer to prevent the moisture and oxidation of the circuit and increase the service life.





Power Socket

High Refresh rate




our module



other factory

Wide view angle

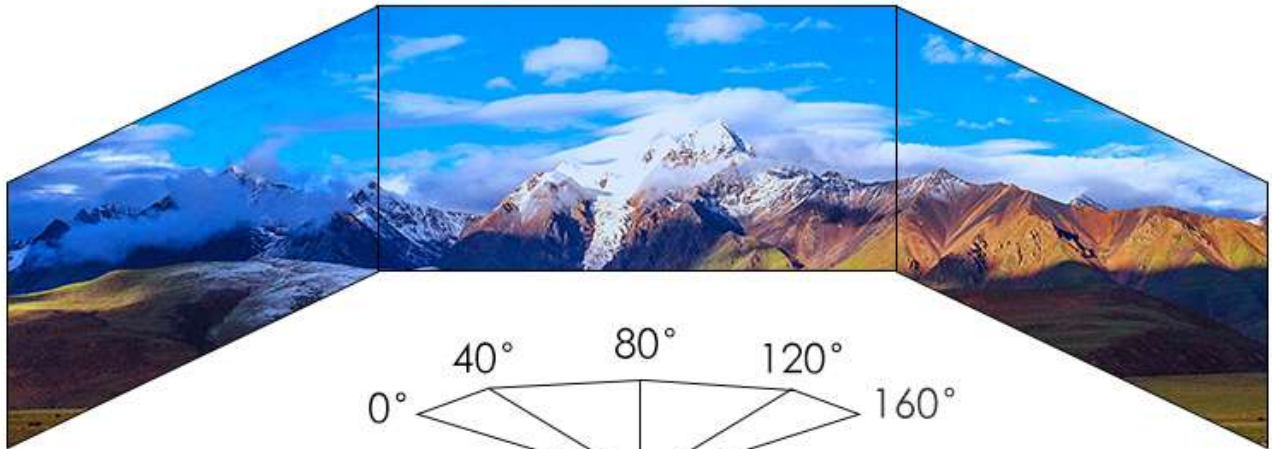

H 160/V 120

Item	Value
Model No.	P2
Pixel Pitch(mm)	2
Pixel Density(dots/sqm)	250000
LED Type	SMD1515
Drive type	1/4 S
Viewing Angle(Deg.)	H:140 V:120
Brightness(nits)	800~1000
Refresh Rate(Hz)	3840
Module Size(mm)	320*160
Cabinet Size Recommended (mm)	160*80
Cabinet Material	Die-casting aluminum
Power Consumption (Avg./Max. W/sqm)	350/650
IP Grade	IP31
Operating Temp/Humidity (°C/%RH)	-20°C~50°C 10~90%RH
Storage Temp/Humidity (°C/%RH)	-30°C~60°C 10~90%RH
Lifetime(hours)	≥100000(Normal Temp)